


BOYARD 博阳

COOPERATIVE PARTNER
合作伙伴




 **BOYARD**
COMPRESSOR
博阳压缩机样本

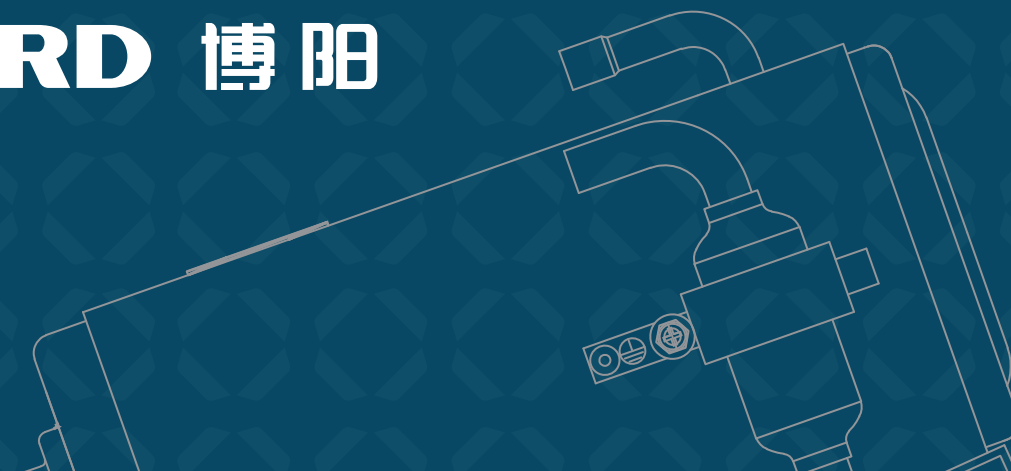

浙江博阳压缩机有限公司
zhejiang boyang compressor co.,ltd.

地址: 浙江省兰溪市兰江街道曙光路5号
P.C: 321103
网址: www.zjboyang.com
Tel: +86-579-88988061
Fax: +86-579-88948506

ADD: No.5 Shuguang Rd., Lanjiang Street, Lanxi,
Zhejiang, China
TEL: +86-579-88988061 Fax: +86-579-88948506
Email: sales@zjboyang.com
<http://www.zjboyang.com> P.C: 321103

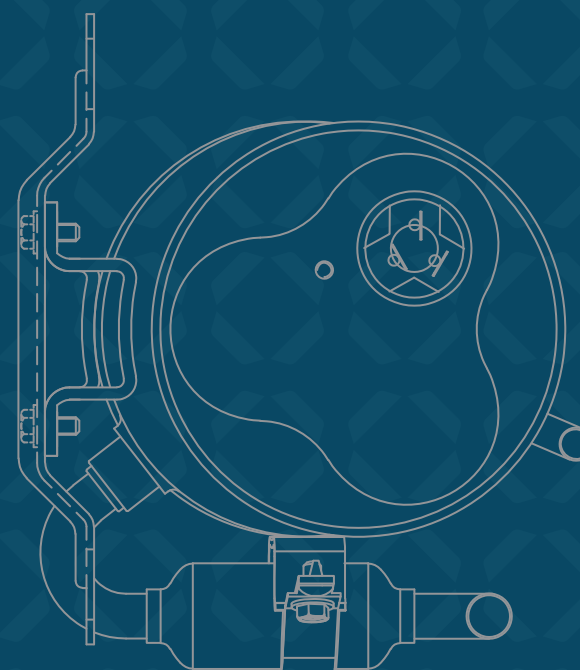

目录 CONTENTS

◇ 关于我们	03
◇ 产品特点	04
◇ 发展历程	06
◇ 压缩机命名	07
◇ 性能参数	
房车空调	09
车用&移动空调	10
轻商变频&移动制冷	11
轻商定频冷冻冷藏	13
特种空调压缩机	14
其他	14

◇ ABOUT US	03
◇ PRODUCT FEATURES	04
◇ DEVELOPMENT HISTORY	06
◇ COMPRESSOR NAMING	07
◇ PERFORMANCE PARAMETER	
Rv Air Conditioning	09
Car Air Conditioning	10
Moving Cold Chain	11
Commercial Refrigeration	13
Special Air Conditioner Compressor	14
Other	14

◇ 公司愿景	制冷领域一流供应商
◇ 公司使命	致力于制冷领域技术应用到更广阔的生活领域
◇ 公司核心价值观	诚信、执着、创新、共赢
◇ Company Vision	To be the first-class supplier in the refrigeration field
◇ Company Mission	Cooling For Better Life
◇ Company Core Value	Faith,persistence,innovation,win-win situation



关于我们 ABOUT US

浙江博阳压缩机有限公司成立于2006年，是一家专业从事卡车、新能源汽车、房车、移动冷链运输车制冷压缩机、中低温压缩机及冷凝机组产品技术研发、生产、制造、销售和服务为一体的国家级高新技术企业。公司始终坚持“诚信、执着、创新、共赢”的企业核心价值观，经过多年的创新发展，博阳压缩机已在同行业中遥遥领先。

公司立足科技创新，倡导绿色环保理念，产品已获得浙江省名牌产品荣誉。是省级高新技术企业研发中心，全国家用电器标准化技术委员会冷链用压缩机标准起草单位，并受邀参与起草了《冷冻冷藏用喷液旋转式压缩机行业标准》。公司倡导自主创新，已获得国家专利局授权专利34项，其中发明专利7项，实用新型29项。

公司占地33000 m²,建筑面积21000 m²，拥有员工近400人。现代化标准厂房、技术研发中心和先进的检测设备，拥有工业产品生产许可证资质，具备年产100万台转子压缩机的能力。建立了完整的产品质量保证体系和环境管理体系，通过IATF16949质量体系认证、ISO14001环境管理体系认证、CCC、CE、UL、RoHS、REACH等多项认证。

公司始终坚持“质量第一，信誉第一”的宗旨，以科学的管理手段，雄厚的技术力量，不断深化改革，创新机制，适应市场，全面发展，不断拓展压缩机的应用领域，产品广泛应用于商超冷柜、物流冷链、冷库、除湿干燥设备、液体冷却、电池热管理、新能源汽车、卡车、船舶等不同的领域。公司凭借着良好的产品性价比和完善的售后服务体系，已与众多的国内外客户建立了良好的合作关系，产品远销欧盟、北美、澳洲、中东、东南亚、南非、南美洲等国家和地区。

Zhejiang Boyang Compressor Co., LTD was born in 2006,is a state - level high - tech enterprise specializing in R&D, production, manufacture, sales and service of refrigeration compressors and units for trucks, new energy vehicles, RV and mobile cold chain transport vehicles, Medium and low temperature compressor and condensing unit. The company always adheres to the core values of “ Faith, Persistence, Innovation, win - win situation ” . After years of continuous innovation and development, Boyang Compressor has taken the lead in the industry.

Based on scientific and technological innovation, the company advocates the concept of green environmental protection. The products have won the honor of Zhejiang brand products. It is the research and development center of provincial high - tech enterprises, the drafting unit of the National Standardization Technical Committee of Household Appliances for Cold Chain Compressor Standards, and has been invited to participate in the drafting of the "Industrial standard for liquid injection rotary compressors for refrigeration". The company advocates independent innovation and has obtained 34 patents authorized by the State Patent Office, including 7 invention patents and 29 utility models.

The company covers 33,000 square meters including 20,000 square meters of architectural area and nearly 400 employees. We have advanced production line, testing equipment and R&D center, We have the qualification of industrial product production license and the ability to produce 1 million rotary compressors per year. A complete product quality assurance system and environmental management system have been established. It has passed IATF16949 quality system certification, ISO14001 environmental management system certification, CCC, CE, UL, RoHS, REACH and other certifications.

The company always adheres to the tenet of "quality first, reputation first". With scientific management means and strong technical force, it continuously deepens reform, innovates mechanism, adapts to market, develops all - round development and expands compressor application fields. The products are widely used in commercial ultra - cold cabinets, logistics cold chain, cold storage, dehumidification and drying equipment, liquid cooling, battery heat management, new energy automobiles. Different fields such as trucks, ships, etc. With good product cost performance and perfect after - sales service system, the company has established good cooperative relations with many domestic and foreign customers. The products are exported to European Union, North America, Australia, Middle East, Southeast Asia, South Africa, South America and other countries and regions.

产品特点 PRODUCT FEATURES

移动冷链用压缩机产品特点

- 小型超低卧式双转子结构
- 应对1L最后一公里市场痛点核心设计开发(发明专利)
- 耐高温高可靠性设计(40℃高温环境下可持续工作)

轻商冷冻冷藏用压缩机产品特点

- 产品系列齐全(各种电源制式,冷量范围覆盖1HP~3HP系统需求)
- 产品配置丰富(出厂时已匹配好启动配电盒及合适的喷液装置)
- 全系列双缸产品可选(运行平稳、振动小)

驻车空调用压缩机产品特点

- 高效低噪振动小(节能省电舒适)
- 连接牢固、密封性好、耐振性好、防护等级高
- 双转子成熟制造工艺、批量化生产

Transport refrigeration compressor feature

- With ultra-low height horizontal dual rotor feature
- Applied to the last mile delivery.(patent acquired)
- High endurance to high temp working condition


Commercial refrigeration compressor feature

- Complete product series include all kinds of power supply from 1HPto 3HP cooling capacity
- Well assembled configuration with electric box and capillary tube
- Dual rotor models available for all series(lower vibration and noise)

Vehicle(truck/RV)parking AC compressor feature

- With low noise and vibration, high efficiency and energy saving
- Sturdy connection, well sealed, high level of protection
- Mature manufacture technique for dual rotor series

发展历程

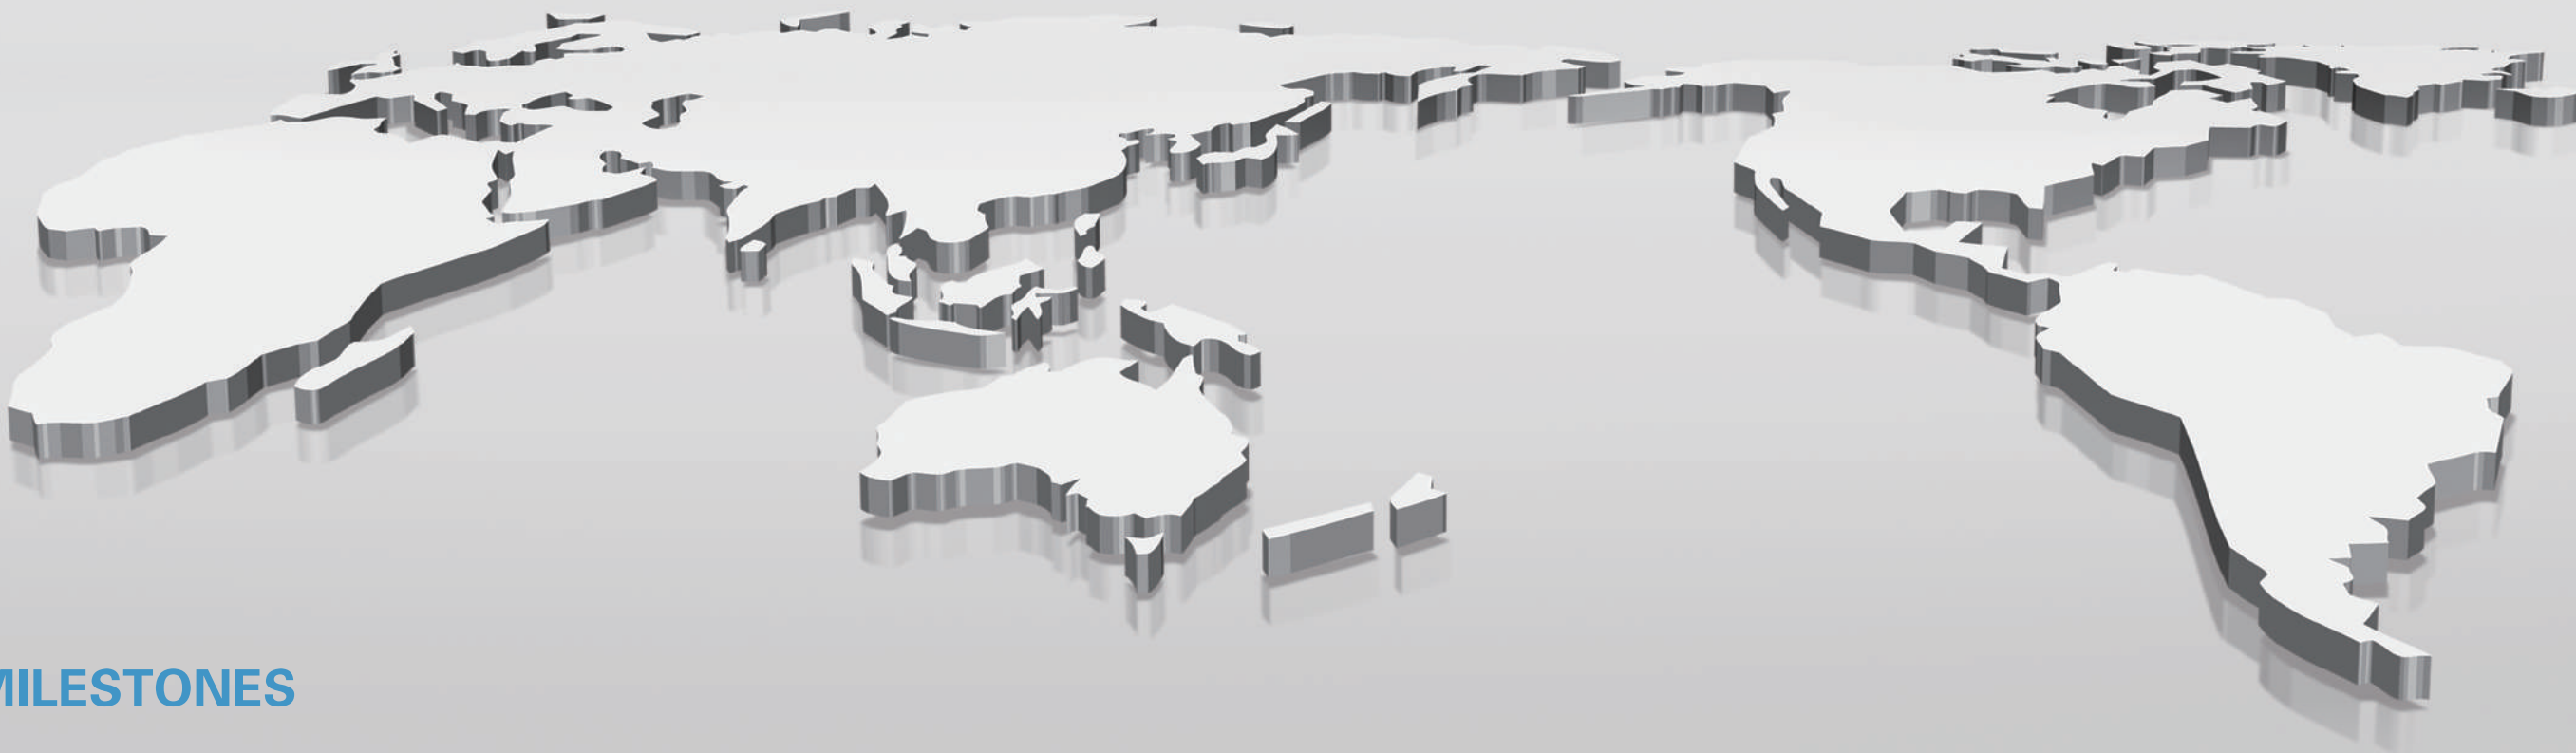


MILESTONES




压缩机命名

COMPRESSOR NAMING

命名方法(一)

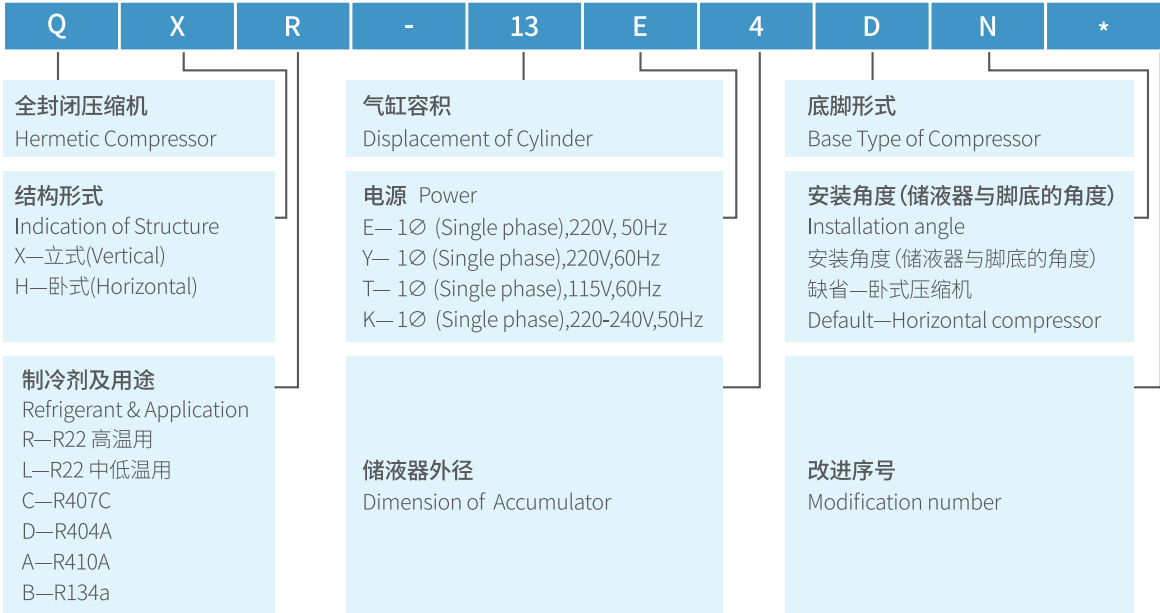

命名方法(二)

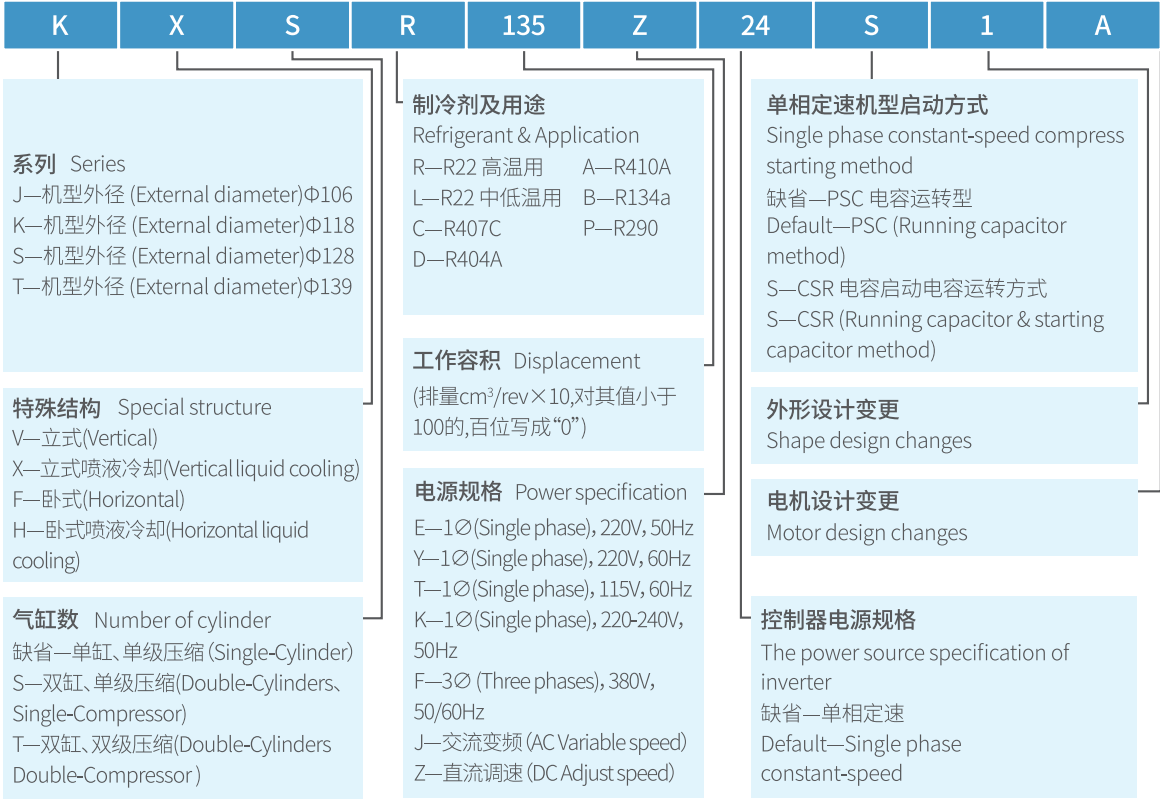

性能参数

PERFORMANCE PARAMETER



房车空调 Rv Air Conditioning

R410A 1PH 115V 60Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号 Model	排量 (cc/rev) Displacement	制冷量 (W) Capacity	输入功率 (W) Input Power	电流 (A) Current	COP (W/W)	压缩机高度 Height	测试工况 Test Conditions	形式 Form
JFA058T	5.8	1710	600	5.3	2.85	160	工况A	H
JFA075T	7.5	2220	780	6.9	2.85	160	工况A	H
KFA092T	9.2	2755	950	8.5	2.9	190	工况A	H
KFA102T	10.2	3020	1040	9.3	2.9	190	工况A	H
KFA113T	11.3	3330	1150	10.3	2.9	190	工况A	H
SFA138T	13.5	3970	1370	12.3	2.9	200	工况A	H

R32 1PH 115V 60Hz

压缩机型号 Model	排量 (cc/rev) Displacement	制冷量 (W) Capacity	输入功率 (W) Input Power	电流 (A) Current	COP (W/W)	压缩机高度 Height	测试工况 Test Conditions	形式 Form
JFN058T	5.8	1780	630	5.60	2.9	170	工况B	H
KFN088T	8.8	2710	950	8.30	2.85	190	工况B	H
KFN102T	10.2	3200	1100	9.7	2.91	190	工况B	H
KFN113T	11.3	3500	1230	10.9	2.85	190	工况B	H

R410A 1PH 220~240V 50Hz

压缩机型号 Model	排量 (cc/rev) Displacement	制冷量 (W) Capacity	输入功率 (W) Input Power	电流 (A) Current	COP (W/W)	压缩机高度 Height	测试工况 Test Conditions	形式 Form
KFSA138K	13.8	3350	1175	5.35	2.85	200	工况A	H

R32 1PH 220~240V 50Hz

压缩机型号 Model	排量 (cc/rev) Displacement	制冷量 (W) Capacity	输入功率 (W) Input Power	电流 (A) Current	COP (W/W)	压缩机高度 Height	测试工况 Test Conditions	形式 Form
JFN058K	5.8	1556	546	2.50	2.85	160	工况B	H
JFN065K	6.5	1750	612	2.84	2.86	160	工况B	H
KFN088K	8.8	2223	780	3.55	2.85	170	工况B	H
KFN102K	10.2	2576	904	4.10	2.85	190	工况B	H
SVN120K	12.0	3050	1110	5.2	2.75	240	工况B	V
SFN138K	13.5	3350	1200	5.67	2.8	200	工况B	H
JFSN150Z220(DC-INV)	15.0	3600(2700RPM)	1161	5.3	3.1	190	工况B	H

压缩机测试工况 Test Conditions

测试工况 Test Condition	蒸发温度 Evaporating Temp.	冷凝温度 Condensing Temp.	吸气温度 Suction Temp.	液体温度 Liquid Temp.
工况A	7.2℃	54.4℃	35℃	46.1℃
工况B	7.2℃	54.4℃	18.3℃	46.1℃
工况C	-6.7℃	54.4℃	35℃	46.1℃
工况D	-23.3℃	54.4℃	18.3℃	32.2℃



房车空调 Rv Air Conditioning
R410A 1PH 208~230V 60Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
JFA058Y	5.8	1710	630	2.92	2.83	160	工况A	H
JFA075Y	7.5	2220	780	3.6	2.85	160	工况A	H
KFA092Y	9.2	2755	950	4.4	2.9	190	工况A	H
KFA102Y	10.2	3020	1040	4.8	2.9	190	工况A	H
KFA113Y	11.3	3330	1150	5.3	2.9	190	工况A	H
SFA138Y	13.5	3970	1370	6.4	2.9	200	工况A	H

R32 1PH 208~230V 60Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
JFN058Y	5.8	1780	630	2.90	2.9	170	工况B	H
KFN088Y	8.8	2710	950	4.32	2.85	190	工况B	H
KFN113Y	11.3	3500	1230	5.60	2.85	190	工况B	H

R290 1PH 220~240V 50Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
KFP113K	11.3	1680	525	2.45	3.2	170	工况B	H
KFP142K	14.2	2130	655	3.00	3.25	170	工况B	H
KFP164K	16.4	2470	760	3.50	3.25	190	工况B	H
KFP203K	20.3	3050	953	4.50	3.2	200	工况B	H



车用&移动空调 Car Air Conditioning

R134a&R1234yf DC 12V

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
JVB075Z12	7.5	850	340	27.5	2.50	3300	2500~3700	218	工况A	V
HB075Z12	7.5	850	340	27.5	2.50	3300	2500~3700	145	工况A	H
JVSB116Z12	11.6	1800	635	53	2.80	4000	900~4000	248	工况A	V
JFSB116Z12	11.6	1800	635	53	2.80	4000	900~4000	145	工况A	H
JVSB150Z12	15.0	2100	725	60	2.9	3600	900~4000	248	工况A	V
JFSB150Z12	15.0	2100	725	60	2.9	3600	900~4000	145	工况A	H

R134a&R1234yf DC 24V

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
JVB075Z24	7.5	850	300	12.5	2.83	3300	2500~4000	218	工况A	V
HB075Z24	7.5	850	300	12.5	2.83	3300	2500~4000	145	工况A	H
JVSB150Z24	15.0	2100	656	27.5	3.20	3600	900~4500	265	工况A	V
JFSB150Z24	15.0	2100	656	27.5	3.20	3600	900~4500	145	工况A	H
JVSB180Z24	18.0	2070	646	26.9	3.20	3000	900~3600	265	工况A	V
JFSB180Z24	18.0	2070	646	26.9	3.20	3000	900~3600	145	工况A	H

R134a&R1234yf DC 48V

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
GVPO65Z48	6.5	903	259	5.5	3.48	3600	1800~5100	180	工况A	V
JFSB116Z48	11.6	1470	490	10.5	3.0	3600	900~4500	160	工况B	H
JVSB150Z48	15.0	2100	636	13.5	3.30	3600	900~4500	150	工况A	V
JFSB150Z48	15.0	2100	636	13.5	3.30	3600	900~4500	150	工况A	H
JVSB180Z48	18.0	2500	785	16.0	3.30	3600	900~4500	241	工况A	V
JFSB180Z48	18.0	2500	785	16.0	3.30	3600	900~4500	150	工况A	H
KFSB300Z48	30.0	5250	1750	36.5	3.0	4500	900~5400	200	工况B	H

R290 DC 48V

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
GVPO65Z48	6.5	1184	346	7.2	3.42	3600	1800~5100	180	工况A	V



轻商变频&移动制冷 Moving Cold Chain

R290 DC -INV

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机 高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
GVP065Z	6.5	660	330	/	2.0	3600	1800~5000	180	工况C	V
JVSP116Z	11.6	1070	577	/	1.85	3600	600~5400	210	工况C	V

R134a&R1234yf DC 48V

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机 高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
JFSB116Z48	11.6	916	436	9.2	2.10	3600	1800~4000	160	工况C	H
JFSB116Z48	11.6	428	340	7.2	1.25	3600	1800~4000	160	工况D	H
JFSB150Z48	15.0	1175	560	12.0	2.10	3600	1800~4000	110	工况C	H
JFSB150Z48	15.0	531	425	9.0	1.25	3600	1800~4000	110	工况D	H
KXSD300Z48	30.0	2250	1875	39	1.2	3600	900~5400	180	工况D	V
KHSD300Z48	30.0	2250	1875	39.0	1.2	3600	900~5400	180	工况D	H

R404A&R448A&R449A&455A DC 312V

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	额定转速 (rpm)	转速范围 (rpm)	压缩机 高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Rated Speed	Speed Range	Height	Test Conditions	Form
KHSD203Z312	20.3	2800	1550	5.0	1.8	3600	1800~4800	180	工况C	H
KHSD203Z312	20.3	1590	1270	4.1	1.25	3600	1800~4800	180	工况D	H
KHSD300Z312	30.0	3900	2300	7.4	1.7	3600	1800~4800	180	工况C	H
KHSD300Z312	30.0	2250	1890	6.1	1.2	3600	1800~4800	180	工况D	H
THSD329Z312	32.9	4275	2375	7.8	1.8	3600	1800~4800	195	工况C	H
THSD329Z312	32.9	2450	1960	6.6	1.25	3600	1800~4800	195	工况D	H
THSD456Z312	45.6	5700	3560	11.2	1.6	3600	1800~4800	455	工况C	H
THSD456Z312	45.6	3200	2900	9.2	1.1	3600	1800~4800	455	工况D	H



轻商定频冷冻冷藏 Commercial Refrigeration



R404A 1PH 220~240V 50Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QXD-13K	13.5	820	780	3.6	1.05	305	工况D	V
QXD-16K	16.4	1000	950	4.32	1.05	305	工况D	V
QXD-23K	23.6	1450	1380	6.30	1.05	330	工况D	V
TXSD329KS	32.9	1850	1762	8.00	1.05	445	工况D	V
TXD357KS	35.7	2085	1986	9.00	1.05	350	工况D	V
TXSD456KS	45.6	2530	2400	11.40	1.05	445	工况D	V
QHD-13K	13.5	820	780	3.6	1.05	185	工况D	H
QHD-16K	16.4	1000	950	4.32	1.05	185	工况D	H
KHSD203KS	20.3	1200	1060	4.80	1.13	180	工况D	H
QHD-23K	23.6	1450	1380	6.30	1.05	195	工况D	H
QHD-30K	30.7	1800	1714	7.80	1.05	195	工况D	H
THSD329KS	32.9	1850	1762	8.00	1.05	195	工况D	H
QHD-36K	35.7	2085	1986	9.00	1.05	195	工况D	H
THSD456KS	45.6	2530	2400	11.40	1.05	195	工况D	H

R404A 1PH 220V 60Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
KXD164YS	16.4	1230	1130	5.13	1.08	305	工况D	V
KXSD203YS	20.3	1550	1300	6.00	1.18	330	工况D	V
SXD236YS	23.6	1760	1660	7.50	1.06	330	工况D	V
TXD307YS	30.7	2185	1980	9.60	1.1	330	工况D	V
TXD357YS	35.7	2540	2300	11.00	1.1	330	工况D	V
KHD135YS	13.5	905	905	4.11	1.0	170	工况D	H
KHD164YS	16.4	1230	1130	5.13	1.08	170	工况D	H
SHD236YS	23.6	1760	1660	7.50	1.06	180	工况D	H
THD307YS	30.7	2185	1980	9.60	1.1	195	工况D	H
THD357YS	35.7	2540	2300	11.00	1.1	195	工况D	H

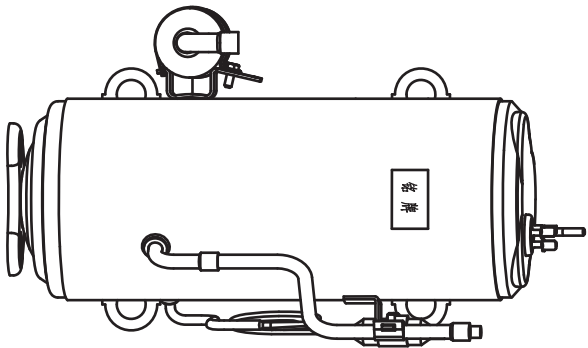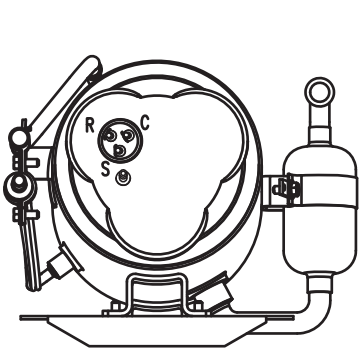



轻商定频冷冻冷藏 Commercial Refrigeration

R404A 1PH 115V 60Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
KHSD203TS	20.3	1463	1278	11.2	1.14	180	工况D	H

R404A 3PH 380V 60Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
TXD357F	35.7	2300	2180	4.60	1.06	330	工况D	V
THD357F	35.7	2300	2180	4.60	1.06	195	工况D	H

R22 1PH 220V 50Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QXL-13E	13.5	720	655	3.10	1.1	305	工况D	V
QXL-16E	16.4	880	680	3.20	1.1	305	工况D	V
QXL-23E	23.5	1175	1100	5.2	1.07	330	工况D	V
QXL-30E	30.7	1615	1535	7	1.05	330	工况D	V
QXL-36E	35.7	1800	1715	8	1.05	330	工况D	V
QHL-13E	13.5	720	655	3.10	1.09	185	工况D	H
QHL-16E	16.4	880	680	3.20	1.1	185	工况D	H
QHL-23E	23.5	1175	1100	5.20	1.07	195	工况D	H
QHL-30E	30.7	1615	1535	7.00	1.05	195	工况D	H
QHL-36E	35.7	1800	1715	8.00	1.05	195	工况D	H



特种空调压缩机 Special Air Conditioner Compressor

R22 1PH 220V 50Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QHR-10E	9.6	1550	530	2.45	2.92	180	工况A	H
QHR-13E	13.5	2250	750	3.50	3.00	180	工况A	H
QHR-16E	16.4	2800	950	4.50	2.95	180	工况A	H
QHR-19E	19.6	3250	1120	5.10	2.90	190	工况A	H
QHR-23E	23.6	3920	1360	6.30	2.88	190	工况A	H
QHR-30E	30.7	5100	1800	8.60	2.83	195	工况A	H
QHR-36E	35.7	6060	2090	9.80	2.90	195	工况A	H

R407C 1PH 220~240V 50Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QHC-23K	23.6	3830	1280	6.00	2.99	190	工况A	H
QHC-30K	30.7	5080	1800	8.60	2.83	195	工况A	H
QHC-36K	35.7	5960	2090	9.80	2.85	195	工况A	H

R134a 1PH 115V 60Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
SFB236T	23.6	3200	1085	9.60	2.95	175	工况A	H

其他 Other

R22 1PH 220V 50Hz

H:Horizontal Type 卧式 V:Vertical Type 立式

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QXR-10E	9.6	1580	550	2.6	2.87	300	工况A	V
QXR-13E	13.5	2280	740	3.50	3.08	300	工况A	V
QXR-16E	16.4	2800	910	4.20	3.08	300	工况A	V
QXR-19E	19.2	3250	1070	4.95	3.04	310	工况A	V
QXR-21E	20.8	3520	1180	5.6	2.98	330	工况A	V
QXR-23E	23.6	3920	1300	6.10	3.02	330	工况A	V
QXR-30E	30.7	5100	1710	8.1	2.98	340	工况A	V
QXR-36E	35.7	5950	2030	9.6	2.93	340	工况A	V

R407C 1PH 220~240V 50Hz

压缩机型号	排量 (cc/rev)	制冷量 (W)	输入功率 (W)	电流 (A)	COP	压缩机高度	测试工况	形式
Model	Displacement	Capacity	Input Power	Current	(W/W)	Height	Test Conditions	Form
QXC-10K	9.6	1580	550	2.6	2.87	300	工况A	V
QXC-13K	13.5	2260	760	3.6	2.97	300	工况A	V
QXC-16K	16.4	2670	900	4.10	2.97	300	工况A	V
QXC-19K	19.2	3200	1060	5.0	3.02	315	工况A	V
QXC-21K	20.8	3500	1180	5.60	2.97	330	工况A	V
QXC-23K	23.5	3900	1320	6.00	2.95	330	工况A	V
QXC-30K	30.7	5080	1710	8.1	2.97	340	工况A	V
QXC-36K	35.7	5960	2030	9.8	2.94	340	工况A	V